



PRODUCT CATALOG

2019/2020


PRODUCT CODE

COMPLETE STAINLESS STEEL COVER

63.20.00.15.N.T.00

DIAMETER 200mm

SPECIFICATIONS

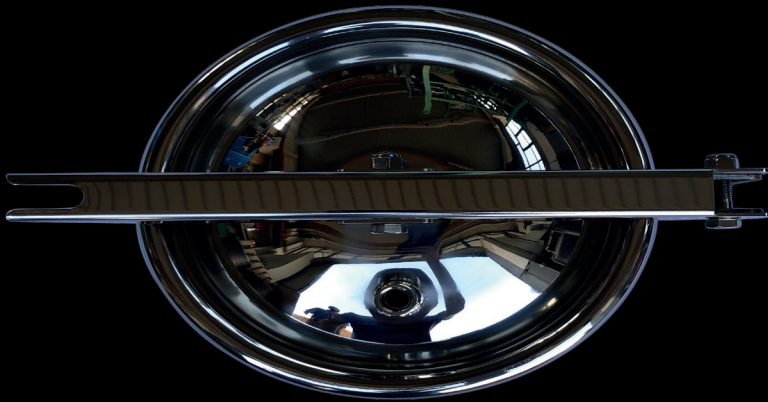

MATERIAL: INOX AISI 304
(AISI 316 on request)

THICKNESS: 15/10


PUNCTUATION: ELECTRIC SPROUTING

POLISHING: MANUAL MIRROR

WELDING: TIG

The cover includes arm, screws, tie-rod and gasket in rubber, compatible with 80% of solvents.

The gasket can be ordered in Antaceto-
ne rubber or in Viton rubber on request.

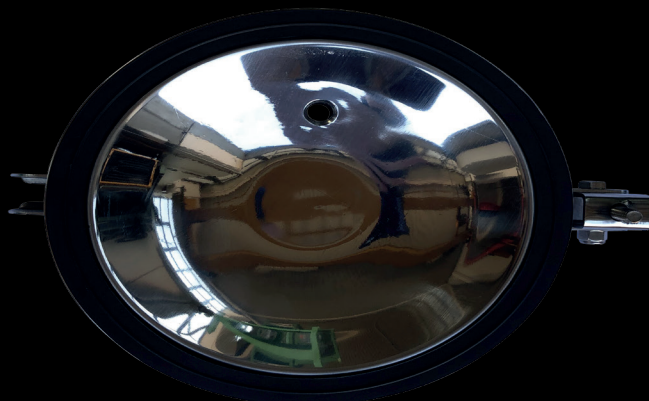


PRODUCT CODE

COMPLETE STAINLESS STEEL COVER

63.25.00.15.N.T.00

DIAMETER 250mm

SPECIFICATIONS

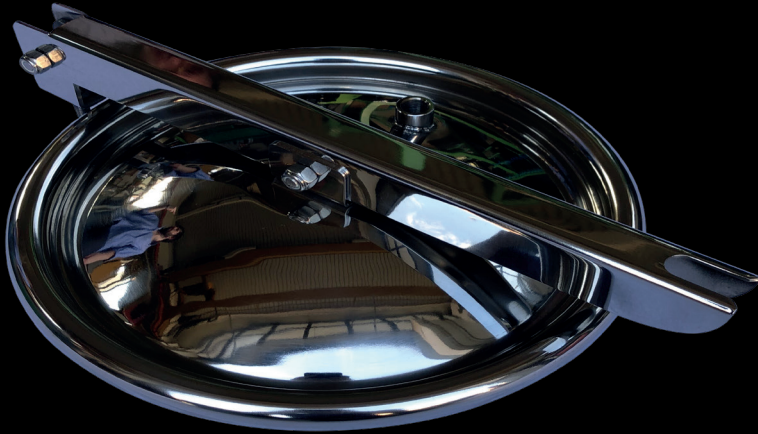

MATERIAL: INOX AISI 304
(AISI 316 on request)

THICKNESS: 15/10


PUNCTUATION: ELECTRIC SPROUTING

POLISHING: MANUAL MIRROR

WELDING: TIG

The cover includes arm, screws, tie-rod and gasket in rubber, compatible with 80% of solvents.

The gasket can be ordered in Antaceto-
ne rubber or in Viton rubber on request.

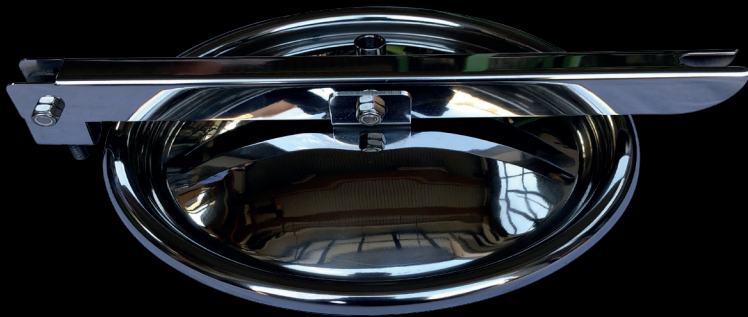

PRODUCT CODE

COMPLETE STAINLESS STEEL LID

63.32.00.15.N.T.00



DIAMETER 320mm

SPECIFICATIONS

MATERIAL:	INOX AISI 304 (AISI 316 on request)
THICKNESS:	15/10
PUNCTUATION:	ELECTRIC SPROUTING
POLISHING:	MANUAL MIRROR
WELDING:	TIG

The cover includes arm, screws, tie-rod and gasket in rubber, compatible with 80% of solvents.

The gasket can be ordered in Antaceto-
ne rubber or in Viton rubber on request.

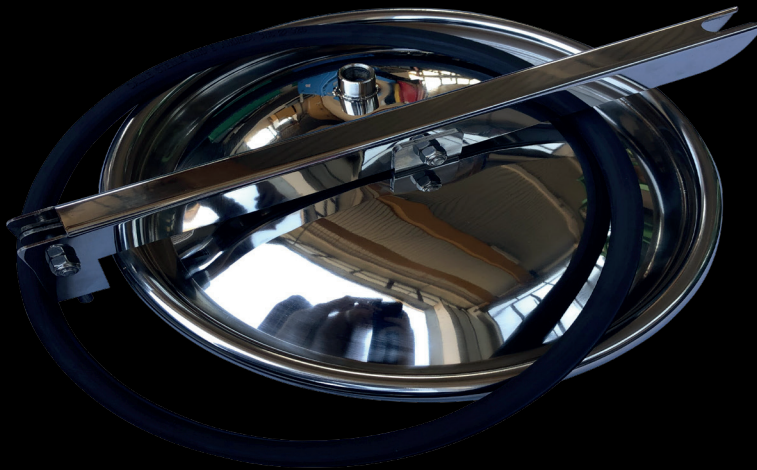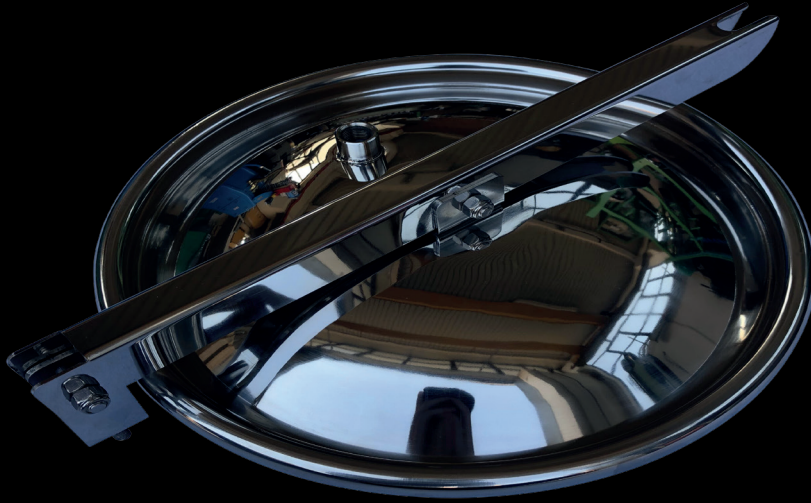


PRODUCT CODE

STAINLESS STEEL COVER

63.32.01.15.N.T.F.00

DIAMETER 320mm
Splash Resistant Border

SPECIFICATIONS

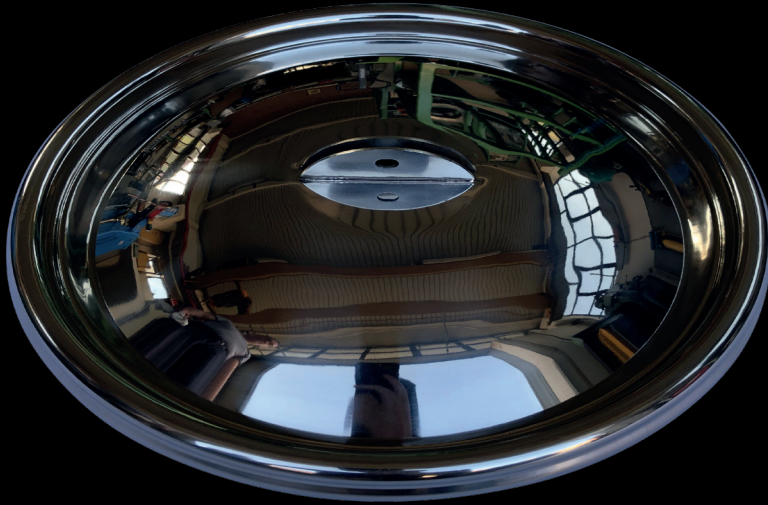

MATERIAL: INOX AISI 304
(AISI 316 on request)

THICKNESS: 15/10

PUNCTUATION: ELECTRIC SPROUTING

POLISHING: MANUAL MIRROR

WELDING: TIG

The cover includes arm, screws, tie-rod and gasket in rubber, compatible with 80% of solvents.

The gasket can be ordered in Antaceto-
ne rubber or in Viton rubber on request.



PRODUCT CODE

COMPLETE STAINLESS STEEL LID

63.40.00.15.N.T.00

DIAMETER 400mm



SPECIFICATIONS



MATERIAL:	INOX AISI 304 (AISI 316 on request)
THICKNESS:	15/10 20/10
PUNCTUATION:	ELECTRIC SPROUTING
POLISHING:	MANUAL MIRROR
WELDING:	TIG

The cover includes arm, screws, tie-rod and gasket in rubber, compatible with 80% of solvents.

The gasket can be ordered in Antaceto-
ne rubber or in Viton rubber on request.

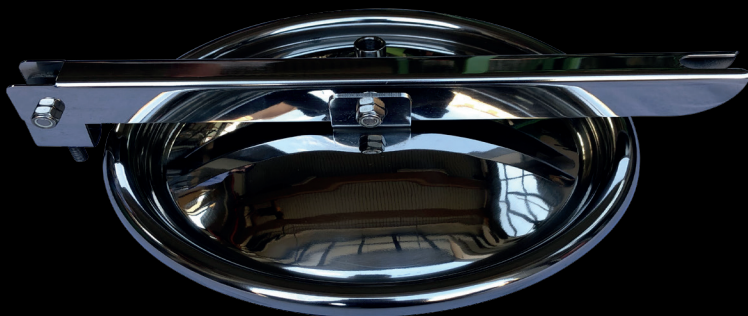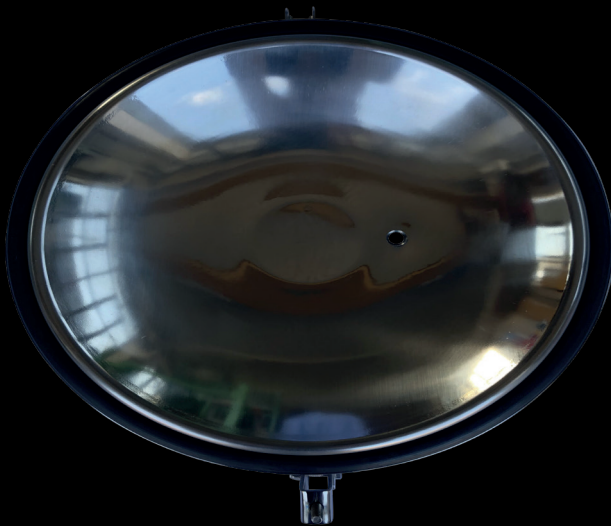

PRODUCT CODE

55SH SEAMLESS EPDM
WHITE RUBBER GASKET

1201/R1

Sterilizable at 120°C
For Electric Doors

SPECIFICATIONS

The gasket can be ordered in Gray
Antacetone rubber or Viton Green rubber
on request



GASKETS

63.00.03.00.N.N.0.0

SPECIFICATIONS

Our gaskets can be ordered in the following diameters:

- 200: 15x16 with standard section
- 240: 14x14 with special section
- 250: 16x16 with standard section
- 320: 14x15 with standard section
- 330: 15x15 with special section
- 400: 16x16 with standard section
- 500: 14x15 with standard section
- 500: 15x18 with narrow seat section
- 500: 20x23 with special section
- 600: 20x20 with standard section

The gasket can be ordered in normal Black, Gray Antacetone rubber, Viton Green rubber and Viton loaded with Teflon at 15% and 18% in blue and dark green on request.

